

Nest US5.1 | 48 x 40

CPP 320 | CPP 320c | CPP 323 | CPP 323c
CPP 325 | CPP 325c | CPP 326 | CPP 326c



Nestable plastic pallet in imperial units 48" x 40" for medium loads

The CPP Nest US5.1 is the newest universal 48x40 inch pallet. Suitable for medium loads, it offers a choice between a nestable version and three different skid versions (3, 5 and 6 skids). All versions are also available with a closed deck. This protects the cargo from pressure points and soil from below.

Bottom support



> 9 feet (9F)



> 3 runners (3R)



> 5 runners (5R)



> 6 runners (6R)

Deck options



> open deck (OD)



> closed deck (CD)




Optional without safety rim

Technical data*1

	Previous name	Bottom support	Top deck	Dimensions [in] / [mm]	Load capacities*2 [lbs] / [kg]			Weight [lbs] / [kg]			
					Static	Dynamic	Racking	HDPE		ACM	
Nest US5.1 (OD-9F)	CPP 320	9 feet, nestable	open	48.0 x 40.0 x 5.5 1219 x 1016 x 140	8800 4000	2800 1300	—	17.0	7.5	20.0	9.0
Nest US5.1 (CD-9F)	CPP 320c		closed					21.0	9.5	23.0	10.5
Nest US5.1 (OD-3R)	CPP 323	3 runners, snap-on	open	48.0 x 40.0 x 5.9 1219 x 1016 x 150	17600 8000	4400 2000	1300 600	25.0	11.5	28.5	13.0
Nest US5.1 (CD-3R)	CPP 323c		closed					29.5	13.5	31.5	14.5
Nest US5.1 (OD-5R)	CPP 325	5 runners, snap-on	open	48.0 x 40.0 x 5.9 1219 x 1016 x 150	17600 8000	5300 2400	1300 600	27.0	12.0	31.0	14.0
Nest US5.1 (CD-5R)	CPP 325c		closed					31.5	14.0	34.0	15.5
Nest US5.1 (OD-6R)	CPP 326	6 runners, snap-on	open	48.0 x 40.0 x 5.9 1219 x 1016 x 150	17600 8000	5300 2400	1300 600	28.0	12.5	32.0	14.5
Nest US5.1 (CD-6R)	CPP 326c		closed					32.5	14.5	35.0	16.0

Entry: 4 ways | Nesting height: 1.5 in / 40 mm | Safetyrim: 0.2 in / 6 mm (optional without)

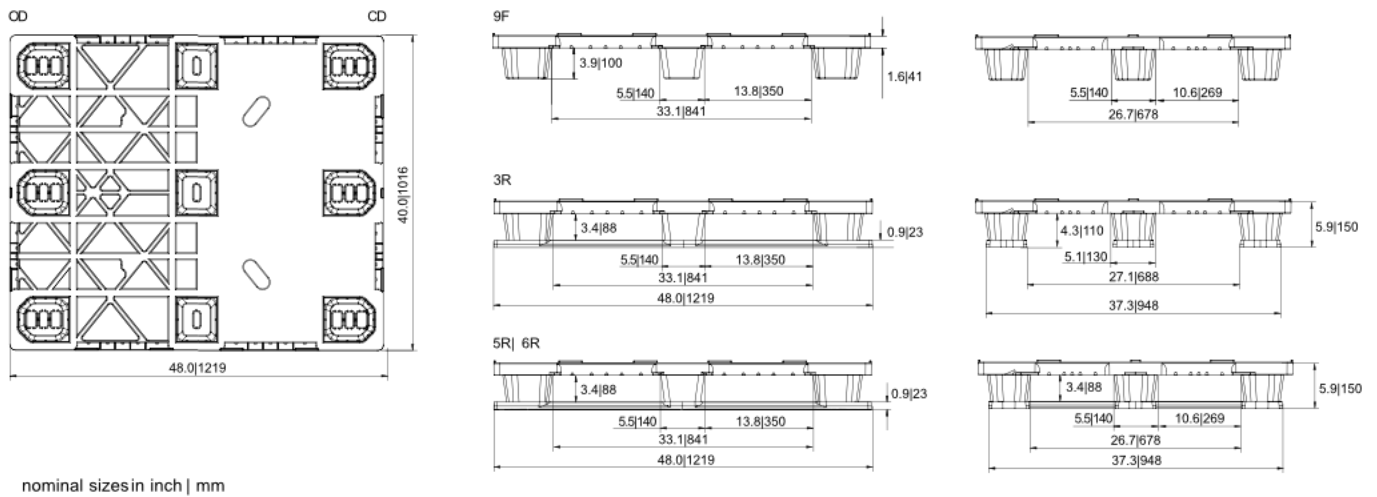

Options

Color: (other colors on request³) > Individual marking³

Anti-slip: safety rim

ESD prevention: —



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (68°F / 20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required ACM pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.