


## **Nest C5**

I 43 x 43





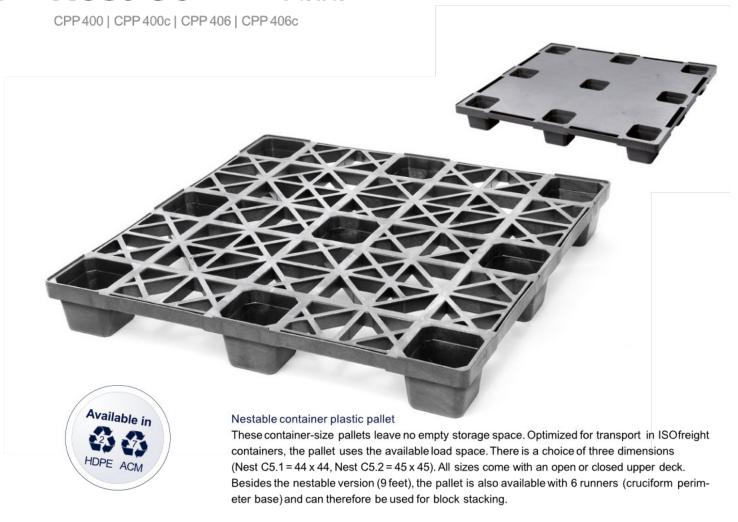



>6 runners (6R)



Optional without safety rim



> open deck (OD)



> closed deck (CD)



Rounded edges





**Easy handling** 


## Technical data\*1

	Previous name	Bottom support	Top deck	Dimensions [in] / [mm]	Load capacities*2 [lbs] / [kg]			Weight[lbs] / [kg]			
					Static	Dynamic	Racking	HDPE		ACM	
Nest C5 (OD-9F)	CPP 400	9 feet, nestable	open	43.3 x 43.3 x 5.5 1100 x 1100 x 140	<b>8800</b> 4000	3300 1500	_	23.0	10.5	25.5	12.0
Nest C5 (CD-9F)	CPP 400c		closed					27.5	12.5	32.0	14.5
Nest C5 (OD-6R)	CPP 406	6 runners	open	43.3 x 43.3 x 6.4 1100 x 1100 x 163	<b>17600</b> 8000	<b>5300</b> 2400	1300 600	31.0	14.0	35.0	16.0
Nest C5 (CD-6R)	CPP 406c		closed					33.0	15.0	37.5	17.0

Entry: 4 ways | Nesting height: 2.4 in / 60 mm | Safetyrim: 0.2 in / 5 mm (optional without)







nominal sizes in inch | mm

## Options

Color: ■ (other colors on request\*3) > Individual marking\*3

Anti-slip: safety rim

ESD prevention: -

<sup>\*</sup>¹ Figures can vary depending on the raw material used and options applied. \*² Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (68°F / 20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. \*³ Minimum quantity required ACM pallets should only be used and stored in a dry environment. Wereserve the right to change any of the stated information without prior notice.