

Nest E5

48 x 32

CPP 210 | CPP 213



Nestable euro-size plastic pallet for medium loads

This robust load carrier is the universal Euro-size pallet for medium loads. It comes in two versions. In the 9-foot nestable version, it saves floor space and transport costs. The version with 3 runners can be used with conveyor technology and bears up to 1100 lbs (500kg) in high racks.

Bottom support



> 9 feet (9F)



> 3 runners (3R)

Deck options



> open deck (OD)



> closed deck (CD)



Available as ESD pallet for transport of electrostatic-sensitive devices.




Nestable CPP plastic pallets require less floor space.

Technical data*1

	Previous name	Bottom support	Top deck	Dimensions [in] / [mm]	Load capacities*2 [lbs] / [kg]			Weight [lbs] / [kg]	
					Static	Dynamic	Racking	HDPE	ACM
Nest E5 (OD-9F)	CPP 210	9 feet, nestable	open	47.2 x 31.5 x 5.5	7100	2600	—	17.5 8.0	20.0 9.0
Nest E5 (CD-9F)	CPP 210c		closed	1200 x 800 x 140	3200	1200			
Nest E5 (OD-3R)	CPP 213	3 runners, snap-on	open	47.2 x 31.5 x 5.9	14100	3500	1100	25.5 11.5	27.5 12.5
Nest E5 (CD-3R)	CPP 213c		closed	1200 x 800 x 150	6400	1600			

Entry: 4 ways | Nesting height: 1.7 in / 44 mm | Safetyrim: 0.2 in / 6 mm (optional without)

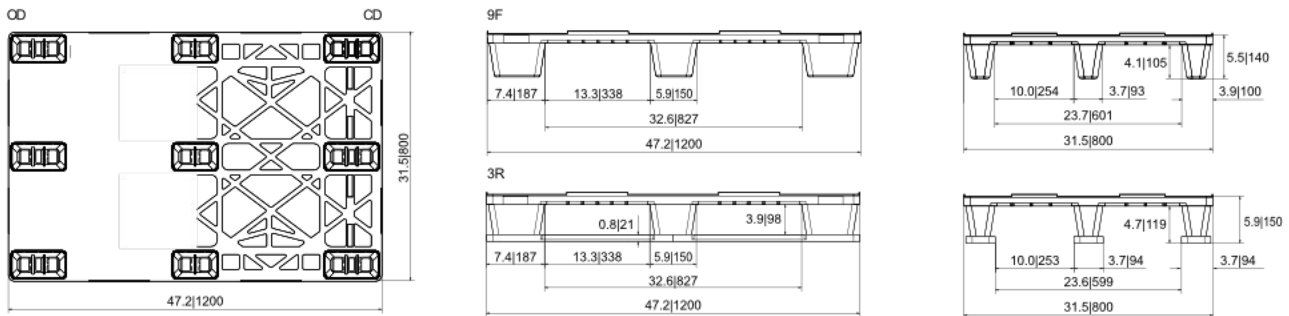

nominal sizes in inches

Options

Color: (other colors on request³) > Individual marking³

Anti-slip: safety rim, grommets on deck, grommets under deck

ESD prevention: anti-static, ESD



*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (68°F / 20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required ACM pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.