

Nest A5

48 x 45

CPP 530 | CPP 533



48" x 45" nestable plastic pallet

With special dimensions of 48 x 45 inch (1219 x 1143 mm), the Nest A5 was developed especially for the automotive industry. The pallet is optionally available with extra high 1 inch (25 mm) safety rim. This allows especially safe transport of boxes on the pallet.

Bottom support



> 9 feet (9F)



> 3 runners (3R)

Deck options



> open deck (OD)



As option: 5 mm ...




... or extra high 25 mm safety rim.

Technical data*1



	Previous name	Bottom support	Top deck	Dimensions [in] / [mm]	Load capacities*2 [lbs] / [kg]			Weight [lbs] / [kg]	
					Static	Dynamic	Racking	PP	ACM
Nest A5 (OD-9F)	CPP 530	9 feet, nestable	open	48.0 x 45.0 x 5.5 1219 x 1143 x 140	8800 4000	3300 1500	—	23.0 10.5	24.0 11.0
Nest A5 (OD-3R)	CPP 533	3 runners, snap-on		48.0 x 45.0 x 5.9 1219 x 1143 x 150	17600 8000	4400 2000	1300 600	31.0 14.0	32.0 14.5

Entry: 4 ways | Nesting height: 2.6 in / 65 mm | Safetyrim: 0.2 or 1.0 in / 5 or 25 mm (optional without)



0.2 in safety rim

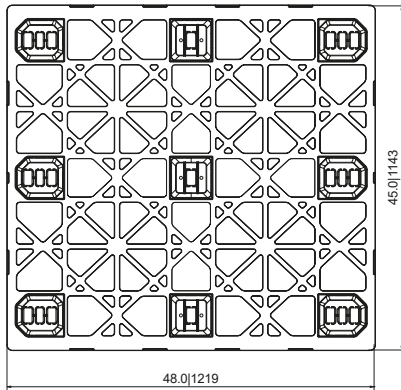


9F | 0.2 in safetyrim

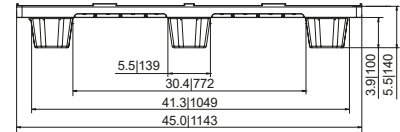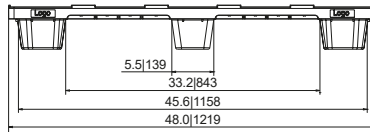



3R | 0.2 in safety rim

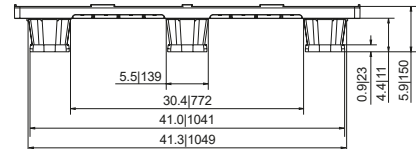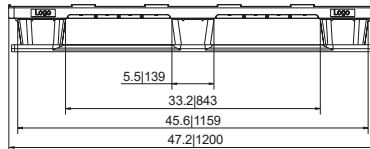



1.0 in safety rim

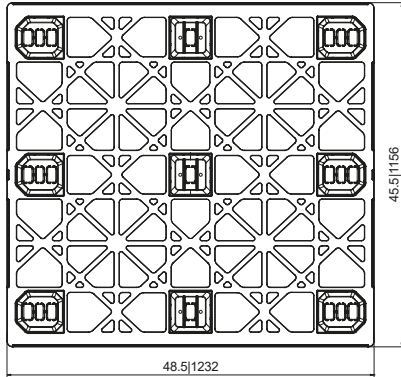

9F | 1.0 in safetyrim

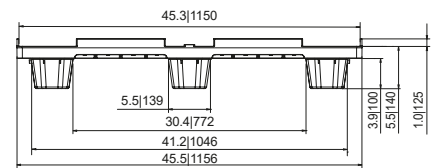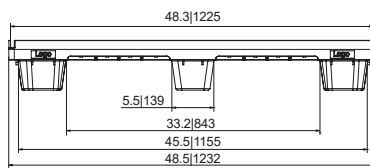

3R | 1.0 in safety rim

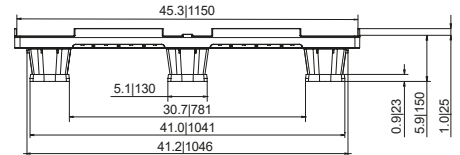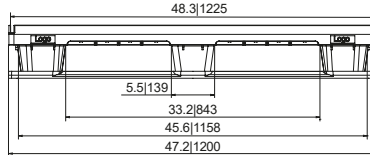

nominal sizes in inch | mm

Options

Color: (other colors on request³)

> Individual marking³

Anti-slip: safety rim 0.2 in,
safety rim 1.0 in

ESD prevention: —

*1 Figures can vary depending on the raw material used and options applied. *2 Guideline values are based both on experience and parts of test ISO 8611, which tests with evenly distributed loads at room temperature (68°F / 20°C). Varying data may result from different conditions of usage. Your specific requirements can be identified upon request. *3 Minimum quantity required ACM pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.